


- ▶ Large soft buttons
- ▶ Ergonomic design for comfort
- ▶ Light operating force
- ▶ Choice of curly or straight tubing
- ▶ Various colour & ident options
- ▶ Inherently waterproof
- ▶ For use with 6871 & 6872 airswitches

Specifications	
Standards/approvals	n/a
Degree of protection	n/a
Connection method	1.5mm I/D tube for use with airswitches with 2mm spouts
Electrical rating	n/a
Contact configuration	n/a
Pressure range	n/a
Operating temperature range	-5°C to +40°C with temperature compensated airswitches
Body material	Thermoplastic
Weight	135 g approx.
Additional information	Various attachment methods and labels available

Recommended depression time is 30 seconds, for applications requiring a greater period please contact sales to discuss further.

### Dimensions

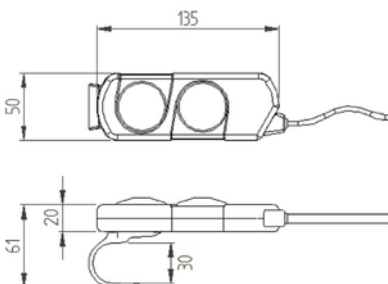



## Ordering information

(Please use the characters in the chart below to create your product code)

**Sample Code**      6450   -   A   B   C   D   -   A   B   F   Z

### Body colour

- A   Grey

---

- B   Black

### Body

- A   With moulded Herga logo

---

- B   With printed Herga logo

---

- C   With printed operation logo  
(select from options below)

---

- D   With blank recess

---

- E   Without label recess

### Operation label options

- A   Bed motif - Head up/down

---

- B   Bed motif - Bed up/down

---

- C   Bed motif - Legs up/down

---

- D   Arrows - up/down

---

- Z   No label required

### Button Colour

- A   Grey

---

- B   Blue

---

- C   Black

---

- D   White

---

- E   Red

---

- F   Green

**If you require a customized solution for your program contact our sales team.**



## Ordering information

(Please use the characters in the chart below to create your product code)

**Sample Code**      6450   -   A   B   C   D   -   A   B   F   Z

### Button labelling

- A Plain buttons

---

- B Buttons with embossed arrows

### Tube type

- A Grey twin polyurethane 1.5mm bore

---

- B Grey twin polyurethane curly coil

### Tube length

- A 2 metres

---

- B 3 metres

---

- F Curly coil - unstretched 0.9m, stretched 2.4m

### Fixtures

- A With hook

---

- B With suction cup

---

- Z No fixtures



### Australian Distributor

**K. D. Fisher & Co. Pty Ltd** ABN 27 007 879 647  
 Head office 18 Benjamin Street St Marys SA  
 5042 T +61 8 8277 3288 T 1300 533 474  
 E [kdf@kdfisher.com.au](mailto:kdf@kdfisher.com.au) [kdfisher.com.au](http://kdfisher.com.au)

**If you require a customized solution for your program contact our sales team.**