




Specifications	
Connection method	1.5mm I/D tube for use with airswitches with 2mm spouts
Operating temperature range	-5° C to +40° C with temperature compensated airswitches
Body material	Thermoplastic
Weight	0.2 Kg
Additional information	Various button colours and designs available, hook optional

Recommended depression time is 30 seconds, for applications requiring a greater period please contact sales to discuss further.

**Dimensions**

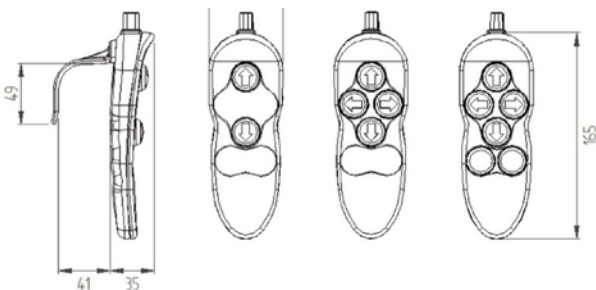



## Ordering information

(Please use the characters in the chart below to create your product code)

**Sample Code**      6451   -   A   B   C   A   -   A   B   ZZ

### Body

- A    2 Button

---

- B    4 Button

---

- C    6 Button

### Hook

- A    No hook fitted

---

- B    Hook fitted

### Buttons

- A    Gray (plain)

---

- B    Blue (plain)

---

- C    Grey (arrows)

---

- D    Blue (arrows)

### Tube

- A    Straight 1.5 metres

---

- B    Curly coil 2.3 metres

### Connectors

- A    No connector

---

- B    Panel mount style

### Accessories

- A    No accessories

---

- B    2 x 6891 - 0013 Airswitch

---

- C    4 x 6891 - 0013 Airswitch

---

- D    6 x 6891 - 0013 Airswitch



### Australian Distributor

**K. D. Fisher & Co. Pty** Ltd ABN 27 007 879 647  
 Head office 18 Benjamin Street St Marys SA  
 5042 T +61 8 8277 3288 T 1300 533 474  
 E [kdf@kdfisher.com.au](mailto:kdf@kdfisher.com.au) [kdfisher.com.au](http://kdfisher.com.au)

**If you require a customized solution for your program contact our sales team.**